

ALUMATANK Vacuum Tank Trailer

5000 to 9500 Gallon Capacities

Available in multiple head diameters depending on capacity and length.

5454 aluminum (mill finish)

1/4" shell / 3/8" heads

(3) 1/4" head baffles

(3) manholes (2 on top – 1 in rear head)

3" or 4" primary (2) ladders

(3) 5" sight glasses

Betts L.E.D. lights

(1) 4" inlet

(1) 6" outlet

Full length hose trays, both sides

Rear bumper

Secondary pads and brackets



Complete Running Gear Package:

1/4" steel frame-primed with epoxy and painted with silver metal acrylic enamel. Hendrickson Air-Ride suspension or equivalent on/off road 25,000 lbs. each axle. (8) 8.25 x 24.5 steel wheels with 11R24.5/14 ply tires. 2-speed landing gear legs. Standard upper coupler.

Tank Options:

Polished aluminum (bright finish)

Additional manhole

Additional ladder

Water compartment

25' hose trays (not full length)

No hose trays

Front fenders w/brackets (under hose tray)

Rear fenders w/brackets (under hose tray)

Grip strut walkway and handrail only

Grip strut walkway totally enclosed

Float gauge in place of sight glasses

2" sight tube in place of sight glasses

36" rear manhole in place of 20" rear manhole

ASME/DOT code certified

Full opening door

Additional work light(s)

6" sample port with adaptor and dust cap

30" high sign panel full length of tank both sides

Moisture trap installed on front head

Primary in manway in place of standard primary

Running Gear Options:


3/16" stainless steel frame in place of steel

Aluminum wheels

"Revolver" upper coupler



NOTES: Diameters and lengths available for specific applications. Dished and flared baffles (if barrel is to be coated) are available in place of standard dished and flanged baffles at no extra cost.

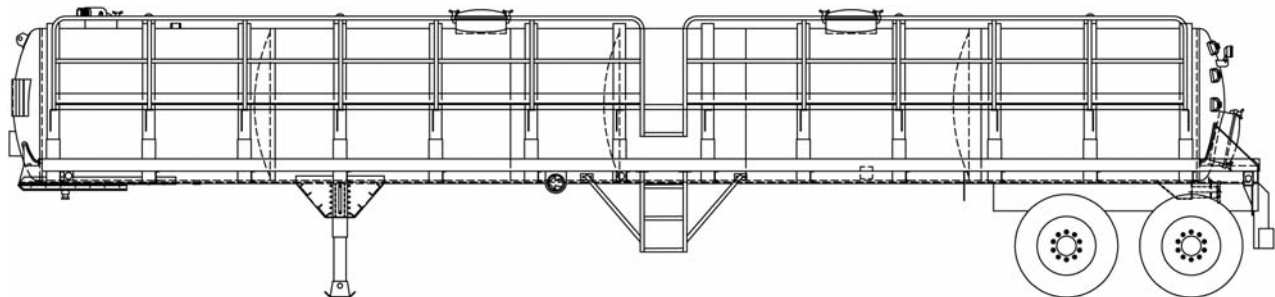

Standard 6300 Gallon / 62" Diameter Heads / Optional Grip Strut Walkway Totally Enclosed